## MATH CLUB COLLECTION



So go ahead, build a spaceship in your bedroom with your vacuum cleaner or host a

36-hour hack-a-thon. No judgment here. In fact, we think you're dreamy.



Brick





## TECH UPD8

4TDT40220T Theorem 400012 24 in x 24 in

Monolithic



## TECH UPD8

4TDT40220T Theorem 400012 24 in x 24 in

Random









## SUPERCOMPUTER™

4SAT40220T Algorithm 400011 24 in x 24 in

Ashlar



## SUPERCOMPUTER

4SAT40220T Geometry 400005 24 in x 24 in

Brick





## **TECH UPD8**

4TDT40220T Theorem 400012 24 in x 24 in

Ashlar




## SUPERCOMPUTER

4SAT40220T Algorithm 400011 24 in x 24 in

Random



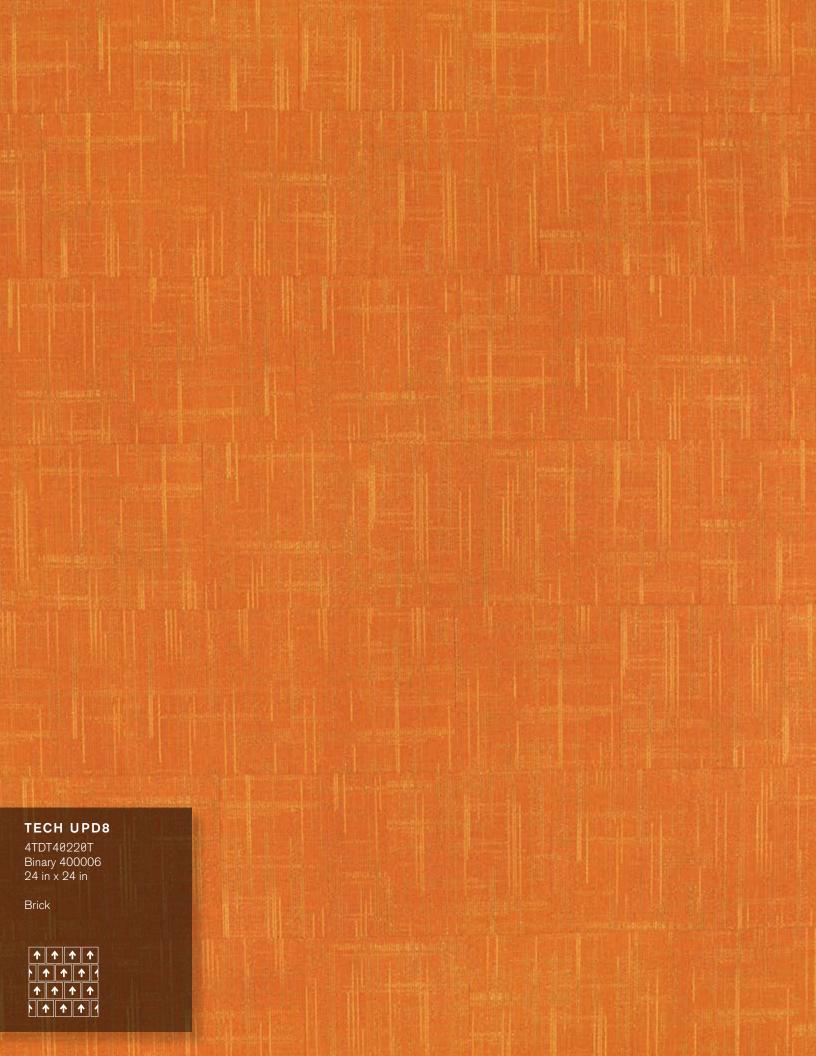





## **SUPERCOMPUTER** 4SAT40220T Algorithm 400011 24 in x 24 in Monolithic **TECH UPD8**

## TECH UPD8 4TDT48AA8T Golden Rectangle 400013 Plus or Minus 400014 18 in x 36 in Parquet

# SUPERCOMPUTER 4SAT40AA0T Plus or Minus 400014 18 in x 36 in Herringbone





## SUPERCOMPUTER

4SAT40220T Algorithm 400011 24 in x 24 in

Quarter Turn




## SUPERCOMPUTER

4SAT40AA0T Theorem 400012 18 in x 36 in

Brick



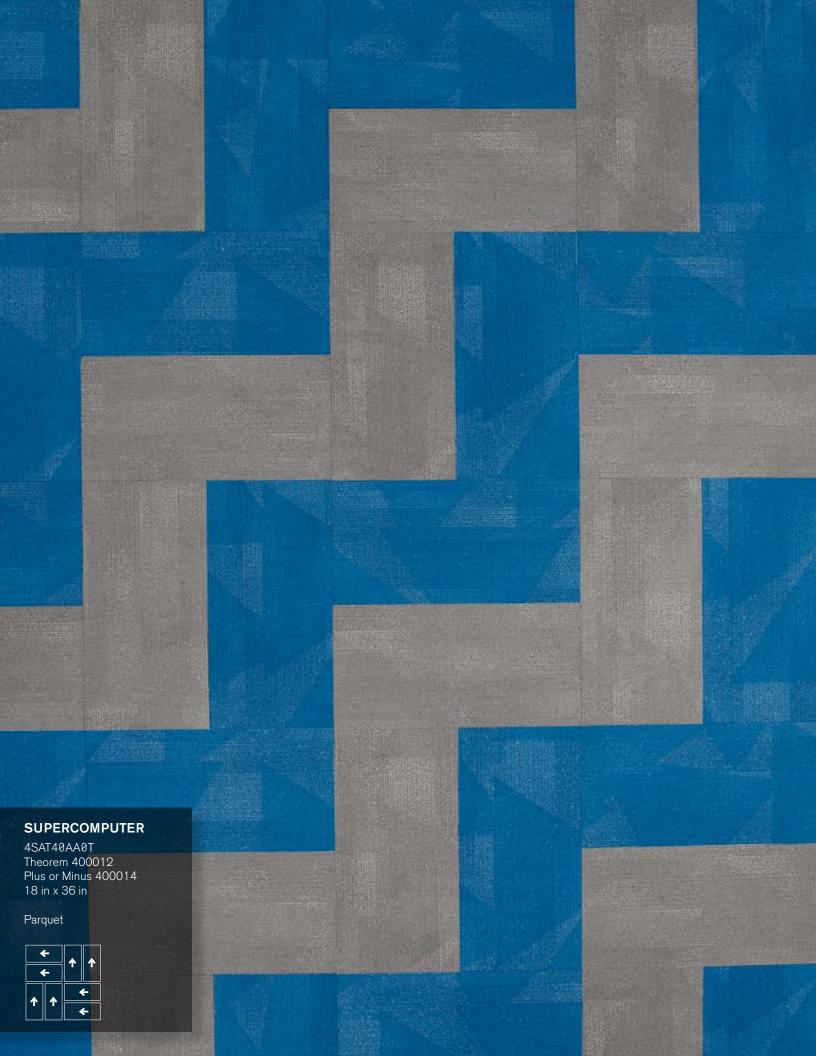







Nonzero 400017

### MATH CLUB COLLECTION



SPECIFICATIONS SUPERCOMPUTER™ TECH UPD8™

Style Number 4SAT4 4TDT4

Product Construction Tufted Textured Loop Tufted Textured Loop

Fiber Antron® Legacy™ Type 6,6 Nylon Antron® Legacy™ Type 6,6 Nylon

 Dye Method
 COLORCAST™
 COLORCAST™

 Soil/Stain Protection
 XTERA™
 XTERA™

Secondary BackingNexStep® Cushion TileNexStep® Cushion TileAFIRMA™ Hardback TileAFIRMA™ Hardback TileMachine Gauge1/12 in (47.2 ends/10 cm)1/12 in (47.2 ends/10 cm)

 Machine Gauge
 1/12 in (47.2 ends/10 cm)
 1/12 in (47.2 ends/10 cm)

 Stitches
 9.3/in (36.6 ends/10 cm)
 10.5/in (41.3 ends/10 cm)

Pile Density 5,381 oz/yd³ 5,478 oz/yd³
Total Weight

 NexStep® Cushion Tile
 92 oz/yd² (3,119.3 g/m²)
 92 oz/yd² (3,119.3 g/m²)

 AFIRMA™ Hardback Tile
 73 oz/yd² (2,475.1 g/m²)
 73 oz/yd² (2,475.1 g/m²)

NexStep® Cushion Tile 0.315 in (8.0 mm) 0.325 in (8.3 mm)

AFIRMA™ Hardback Tile 0.195 in (5.0 mm) 0.205 in (5.2 mm)

Pattern Repeat None None

Radiant Panel Passes Class 1, ≥ 0.45 W/cm² (ASTM-E648) Passes Class 1, ≥ 0.45 W/cm² (ASTM-E648) Smoke Density < 450 dm Corrected (ASTM-E662), Flaming < 450 dm Corrected (ASTM-E662), Flaming

Static ≤ 3.5 kV (AATCC-134), Step ≤ 3.5 kV (AATCC-134), Step

Flammability Passes Methenamine Pill Test (CPSC-FF1-70) Passes Methenamine Pill Test (CPSC-FF1-70)

When selecting colors beyond those swatched in the architect folder, COLORCAST™ utilizes a standard order size of 50 square yards in tile or broadloom (based on availability) and up to 5% overage, with no upcharges. For more information, please contact your local account executive.

Fast Track is Bentley's quick-ship program. This program is designed for maximum flexibility and expedited delivery to the client. Supercomputer and Tech UpD8 are available in 13 colorways in 18 in x 36 in and 24 in x 24 in NexStep® Cushion Tile and AFIRMA™ Hardback Tile. Orders of 1,500 square yards or less will be ready to ship within 10 business days of order. For orders exceeding 1,500 square yards, please contact our Customer Care Concierge for availability. Custom color option not part of Fast Track program.









## STYLE NUMBERS

Total Thickness

SUPERCOMPUTER	TECH UPD8	BACKING	SIZE
4SAT40AA0T	4TDT40AA0T	NexStep® Cushion Tile	18 in x 36 in (45.72 cm x 91.44 cm)
4SAT40220T	4TDT40220T	NexStep® Cushion Tile	24 in x 24 in (60.96 cm x 60.96 cm)
4SAT40AA0K	4TDT40AA0K	AFIRMA™ Hardback Tile	18 in x 36 in (45.72 cm x 91.44 cm)
4SAT40220K	4TDT40220K	AFIRMA™ Hardback Tile	24 in x 24 in (60.96 cm x 60.96 cm)

### RECOMMENDED CARPET TILE INSTALLATION METHODS

18 in x 36 in



↑ ← ↑ ← ↑ ← Herringbone













Bentley's High PerformancePC, NexStep® Cushion Tile, and AFIRMA™ Hardback Tile products are Cradle to Cradle Certified™ Silver. Bentley products are also certified under the NSF/ANSI Standard 140 – Sustainable Carpet Assessment (NSF 140). Six of Bentley's standard backing products are NSF 140 certified at the Gold level or above. Bentley's carpet products are manufactured in our California mill, a LEED for Existing Buildings: Operations and Maintenance (LEED®-EBOM) Gold certified facility. Please inquire about product warranties for specific backing options.

Patterned carpet may require special attention by the installer to assure a suitable match, and must be addressed in the original labor quotation. Products that go through the shearing process may result in a small loss of yarn weight. Slight variations in color among different production lots are normal and should be considered in the overall installation plan. Carpet specifications and components are subject to normal manufacturing tolerances and may change without notice. Technical performance characteristics are subject to adjustment based on results of post-manufacture testing. Product warranted in accordance with the terms and conditions of Bentley's standard printed warranty in effect at time product is sold. All other warranties, including without limitation any implied warranties of merchantability or fitness for a particular purpose are hereby disclaimed. Made in USA. Warning: unauthorized reproduction of this carpet design constitutes copyright infringement. ©2017 Bentley Mills, Inc.



 $\frac{1}{3} = \frac{3^2 f}{3 x \partial y} \int_{y^{2}}^{x} \int_{z^{2}}^{y} \frac{\pi \ell R^{3}}{4 x^{2}}$   $\frac{1 - \alpha^{2} \xi^{2} - \beta^{2} \eta^{2}}{R^{3}} = \frac{h + \sqrt{R^{2} + h^{2}}}{R} = \frac{\pi \ell R^{3}}{2 x^{2} + 2 x^{2}}$  $\frac{1-\alpha(\varphi-3)}{1-\xi^{2}\eta^{2}} \int_{0}^{R} \int_{0}^{x} dr = \frac{\pi h^{2} \ell R}{2} \rho, S = 2\pi$   $\frac{2}{1(x-2x)} \int_{0}^{2\pi} \int_{0}^{h} \frac{R dx d\theta}{(R^{2}+x^{2})^{2}} \frac{S = 2\pi \alpha \delta}{2} \int_{0}^{2\pi} \frac{u^{2} - 1}{u^{2} - \alpha^{2}} \int_{0}^{2\pi} \frac{u^{2} - 1}{(R^{2} + h^{2})^{2}} \frac{2}{2x(x^{2} + 1)} \frac{u^{2} - 1}{u^{2} - \alpha^{2}} \int_{0}^{2\pi} \frac{dx}{(R^{2} + x^{2})^{2}} \frac{dx}{($