










4WNT50220T Open Road 400330 24 in x 24 in

Quarter Turn








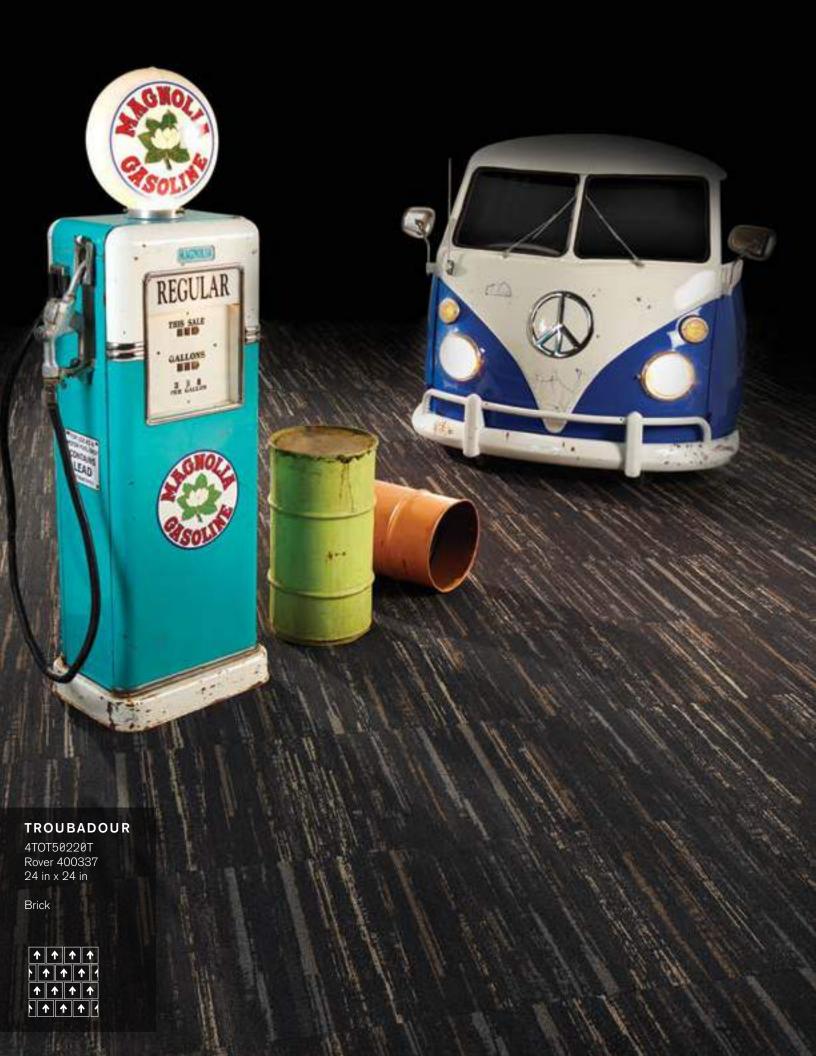



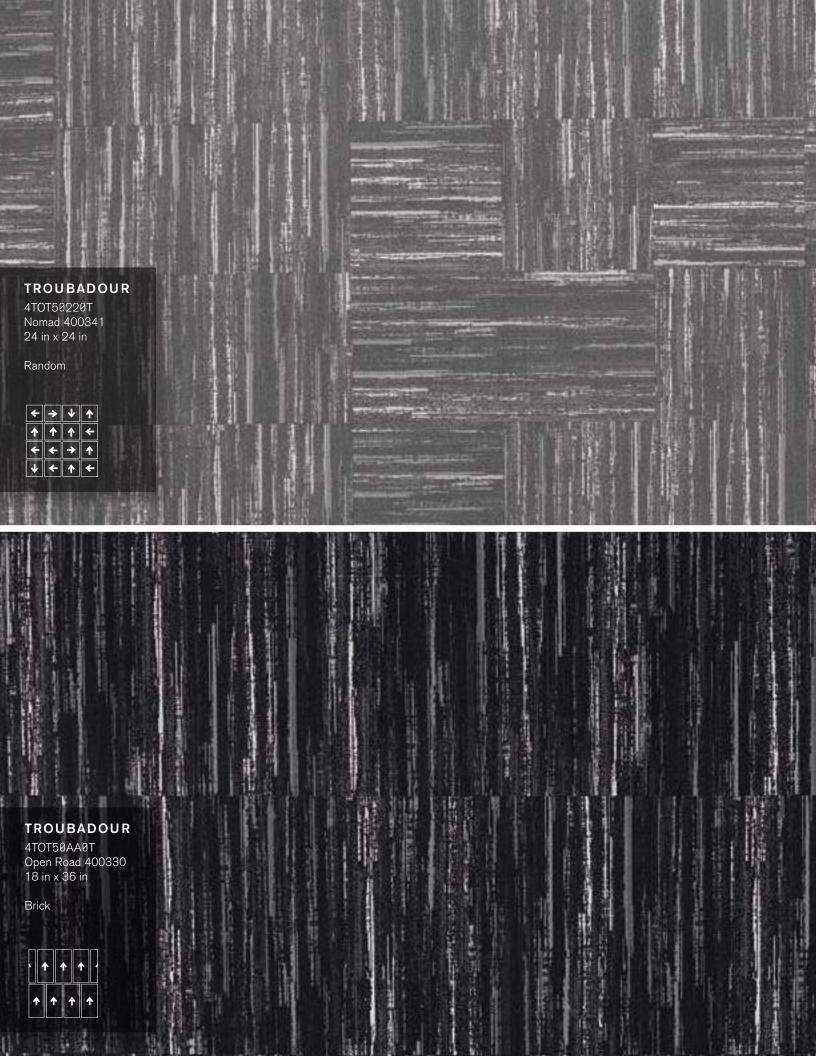
















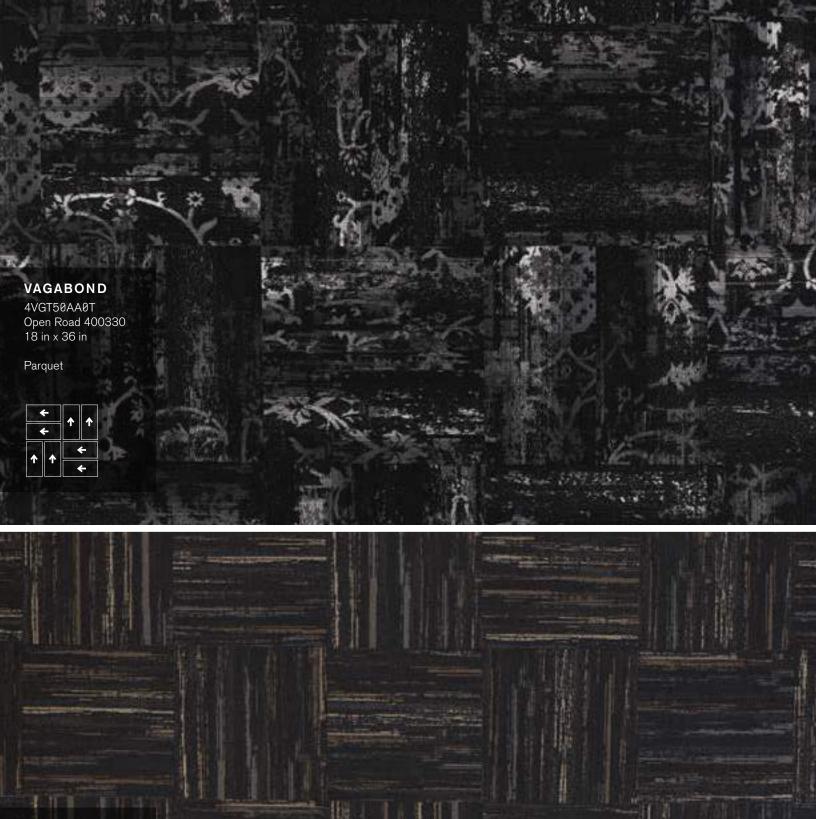

TROUBADOUR

4TOT50220T Rover 400337 24 in x 24 in

Quarter Turn













4VGT50AA0T Rover 400337 18 in x 36

Brick







VAGABOND


4VGT50220T Rover 400337 24 in x 24 in

Monolithic





NEW BOHEMIAN COLLECTION color line as featured in architect folder.



Open Road 400330







Trek 400332 Exotic Circuit 400333



Storyteller 400334



Pure Passage 400331






Rover 400337 Urban Escape 400336



Firefly 400338







Nomad 400341 Hybrid Tribe 400339 Wayfarer 400340



The printed images may not be an accurate reproduction of the product's actual colorways. We strive to offer an authentic representation, but images may vary according to press run. These images are intended as a guide only. If you would like a sample of this product, please call Customer Care at 800,423,4709

Peace Convoy 400342

NEW BOHEMIAN COLLECTION

| SPECIFICATIONS | TROUBADOUR™ | VAGABOND™ | WANDERLUST™ |
|-----------------------|--|--|--|
| Style Number | 4TOT5 | 4VGT5 | 4WNT5 |
| Product Construction | Tufted Textured Loop | Tufted Textured Loop | Tufted Textured Loop |
| Fiber | Antron [®] Lumena™ | Antron [®] Lumena™ | Antron® Lumena™ |
| | Type 6,6 Nylon | Type 6,6 Nylon | Solution-Dyed Type 6,6 Nylon |
| Dye Method | Solution Dye | Solution Dye | Solution Dye |
| Soil/Stain Protection | XTERA™ | XTERA™ | XTERA™ |
| Secondary Backing | NexStep® Cushion Tile | NexStep® Cushion Tile | NexStep® Cushion Tile |
| | AFIRMA™ Hardback Tile | AFIRMA™ Hardback Tile | AFIRMA™ Hardback Tile |
| Machine Gauge | 1/12 in (47.2 ends/10 cm) | 1/12 in (47.2 ends/10 cm) | 1/12 in (47.2 ends/10 cm) |
| Stitches | 11.2/in (44.1 ends/10 cm) | 11.0/in (43.3 ends/10 cm) | 11.0/in (43.3 ends/10 cm) |
| Pile Density | 5,246 oz/yd³ | 5,525 oz/yd³ | 5,074 oz/yd ³ |
| Total Weight | | | |
| NexStep® Cushion Tile | 89 oz/yd² (3,017.6 g/m²) | 89 oz/yd² (3,017.6 g/m²) | 89 oz/yd² (3,017.6 g/m²) |
| AFIRMA™ Hardback Tile | 80 oz/yd² (2,712.5 g/m²) | 80 oz/yd² (2,712.5 g/m²) | 80 oz/yd² (2,712.5 g/m²) |
| Total Thickness | | | |
| NexStep® Cushion Tile | 0.345 in (8.8 mm) | 0.330 in (8.4 mm) | 0.345 in (8.8 mm) |
| AFIRMA™ Hardback Tile | 0.225 in (5.7 mm) | 0.210 in (5.3 mm) | 0.225 in (5.7 mm) |
| Pattern Repeat | None | None | None |
| Radiant Panel | Passes Class 1, ≥ 0.45 W/cm ² (ASTM-E648) | Passes Class 1, ≥ 0.45 W/cm ² (ASTM-E648) | Passes Class 1, ≥ 0.45 W/cm ² (ASTM-E648) |
| Smoke Density | < 450 dm Corrected | < 450 dm Corrected | < 450 dm Corrected |
| Smoke Density | (ASTM-E662), Flaming | (ASTM-E662), Flaming | (ASTM-E662), Flaming |
| Static | ≤ 3.5 kV (AATCC-134), Step | ≤ 3.5 kV (AATCC-134), Step | ≤ 3.5 kV (AATCC-134), Step |
| Flammability | Passes Methenamine | Passes Methenamine | Passes Methenamine |
| i iaiiiiiabiiity | Pill Test (CPSC-FF1-70) | Pill Test (CPSC-FF1-70) | Pill Test (CPSC-FF1-70) |
| | 1 III 1681 (OF 30-11 1-10) | 1 III 1651 (CF3C-11 1-10) | 1 III 1651 (CF 3C-11 1-70) |

Please inquire about product warranties for specific backing options. New Bohemian Collection is available in 13 standard colorways.





| TROUBADOUR | VAGABOND | WANDERLUS [*] |
|------------|------------|------------------------|
| 4TOT50AA0T | 4VGT50AA0T | 4WNT50AA0T |
| 4TOT50220T | 4VGT50220T | 4WNT50220T |
| 4TOT50AA0K | 4VGT50AA0K | 4WNT50AA0K |
| 4TOT50220K | 4VGT50220K | 4WNT50220K |
| | | |



NexStep® Cushion Tile

NexStep® Cushion Tile

AFIRMA™ Hardback Tile

AFIRMA™ Hardback Tile



18 in x 36 in (45.72 cm x 91.44 cm)

24 in x 24 in (60.96 cm x 60.96 cm)

18 in x 36 in (45.72 cm x 91.44 cm)

24 in x 24 in (60.96 cm x 60.96 cm)





RECOMMENDED CARPET TILE INSTALLATION METHODS

18 in x 36 in















SIZE



Bentley's High PerformancePC, NexStep® Cushion Tile, and AFIRMA™ Hardback Tile products are Cradle to Cradle Certified™ Silver. Bentley products are also certified under the NSF/ANSI Standard 140 - Sustainable Carpet Assessment (NSF 140). Six of Bentley's standard backing products are NSF 140 certified at the Gold level or above. Bentley's carpet products are manufactured in our California mill, a LEED for Existing Buildings: Operations and Maintenance (LEED®-EBOM) Gold certified facility.

Patterned carpet may require special attention by the installer to assure a suitable match, and must be addressed in the original labor quotation. Products that go through the shearing process may result in a small loss of yarn weight. Slight variations in color among different production lots are normal and should be considered in the overall installation plan. Carpet specifications and components are subject to normal manufacturing tolerances and may change without notice. Technical performance characteristics are subject to adjustment based on results of post-manufacture testing. Product warranted in accordance with the terms and conditions of Bentley's standard printed warranty in effect at time product is sold. All other warranties, including without limitation any implied warranties of merchantability or fitness for a particular purpose, are hereby disclaimed. Made in USA. Warning: unauthorized reproduction of this carpet design constitutes copyright infringement. ©2015 Bentley Mills, Inc.



