




**BENTLEY**<sup>®</sup>  
DISRUPTOR | TELEPORT





LEFT  
**DISRUPTOR™**  
4DR240220T  
Meta 401461  
24 in x 24 in  
BRICK

RIGHT  
**TELEPORT™**  
4TR240220T  
Meta 401461  
24 in x 24 in  
BRICK

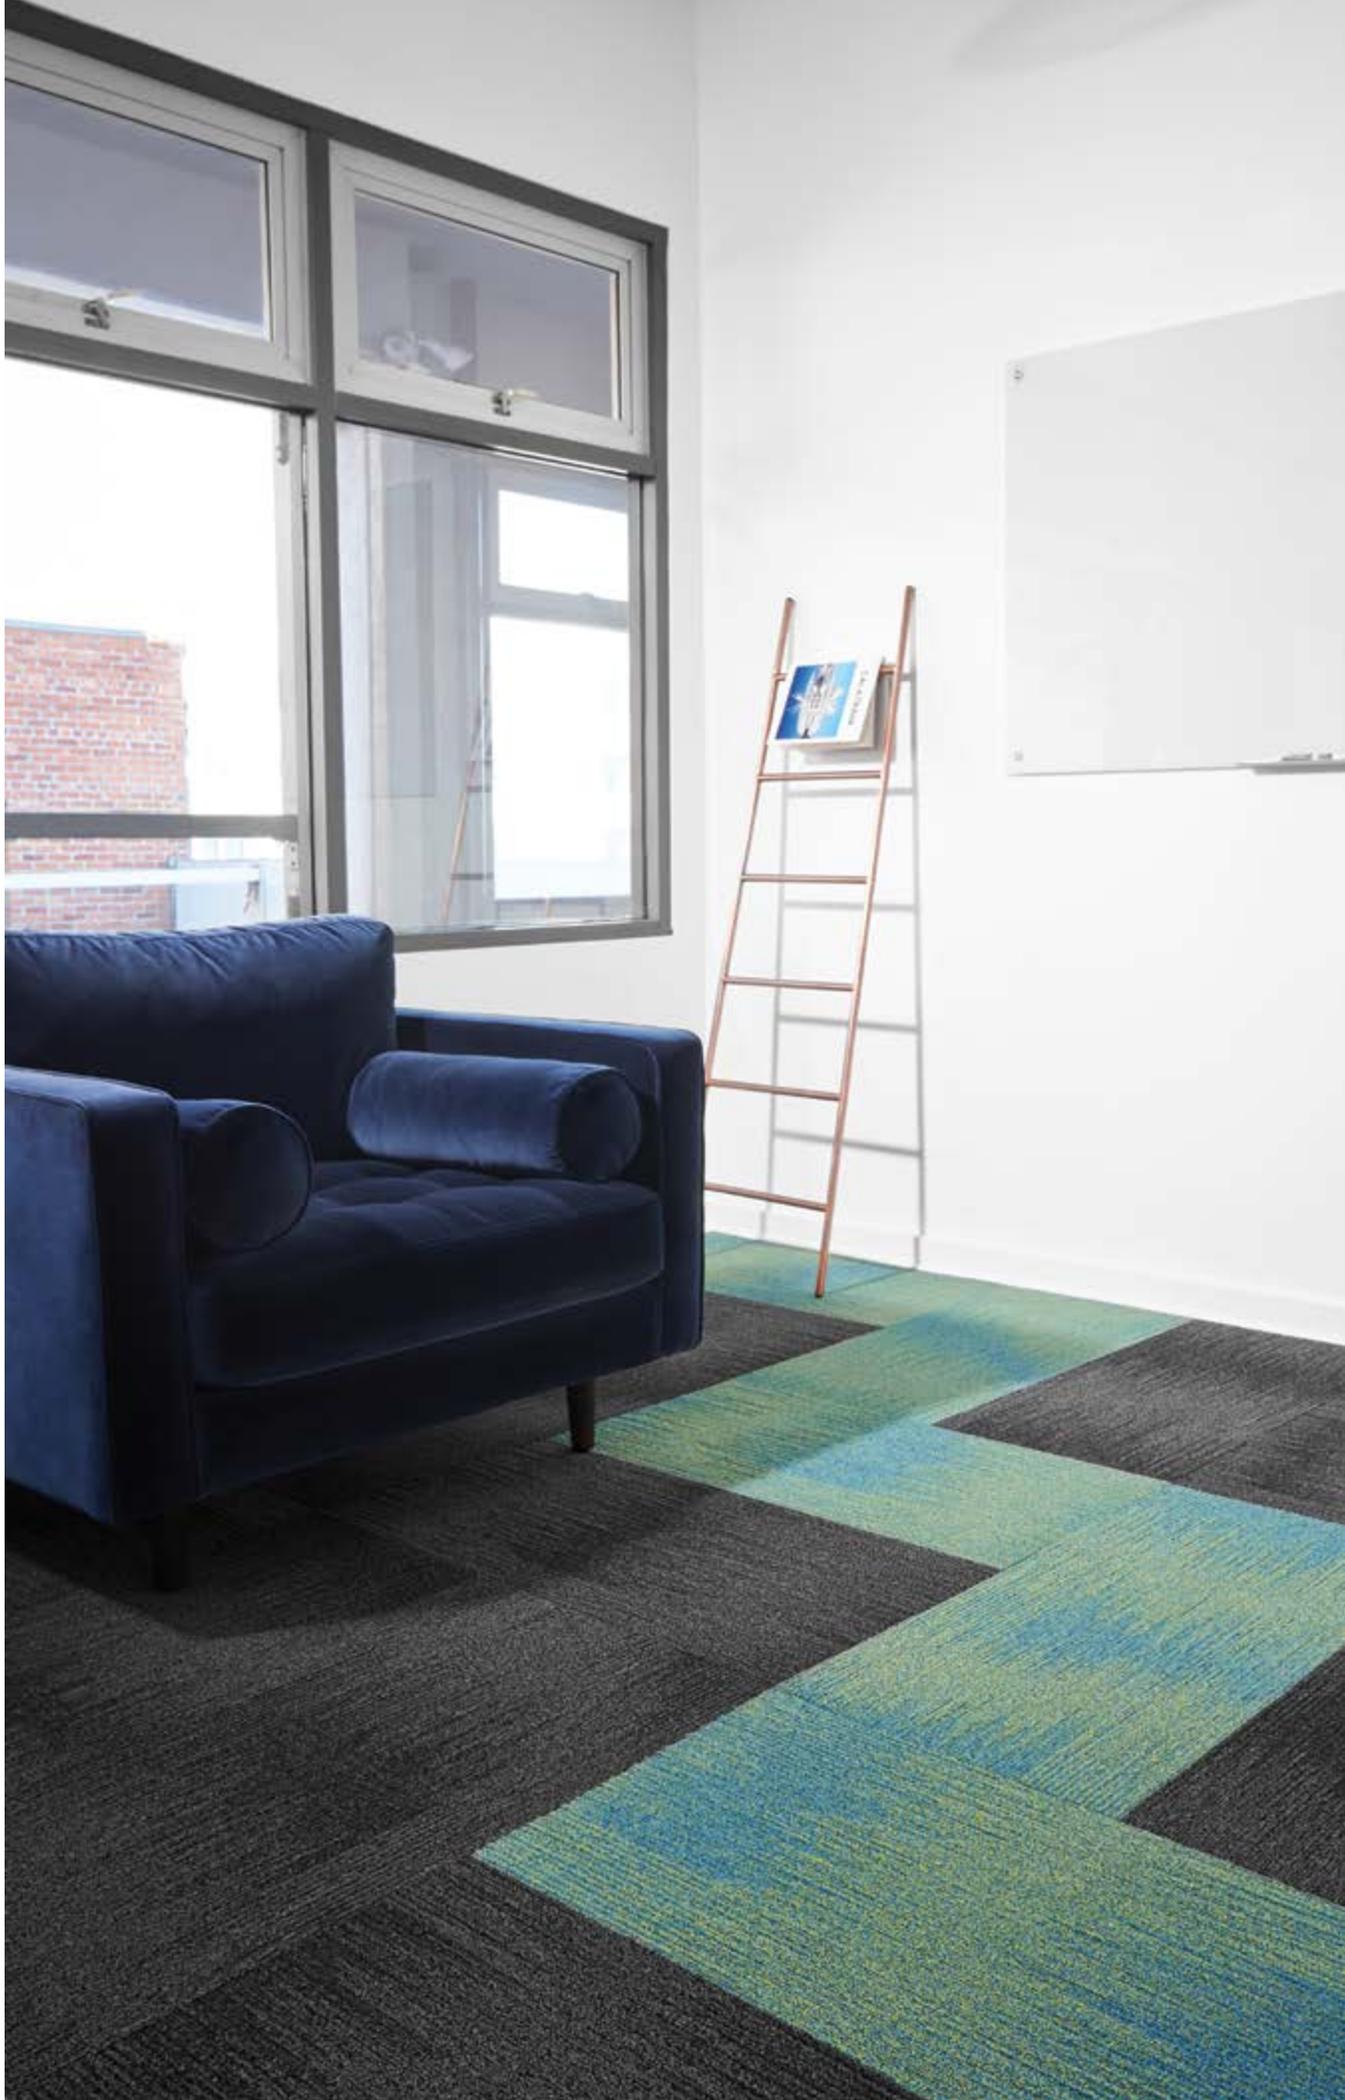

LEFT

**DISRUPTOR**

4DR240AA0T

ACCENT: COLORCAST™

PDS# 253633-127

FIELD: Meta 401461

18 in x 36 in

PARQUET

RIGHT

**DISRUPTOR**


4DR240AA0T

Geo Leaping 401453

18 in x 36 in

BRICK



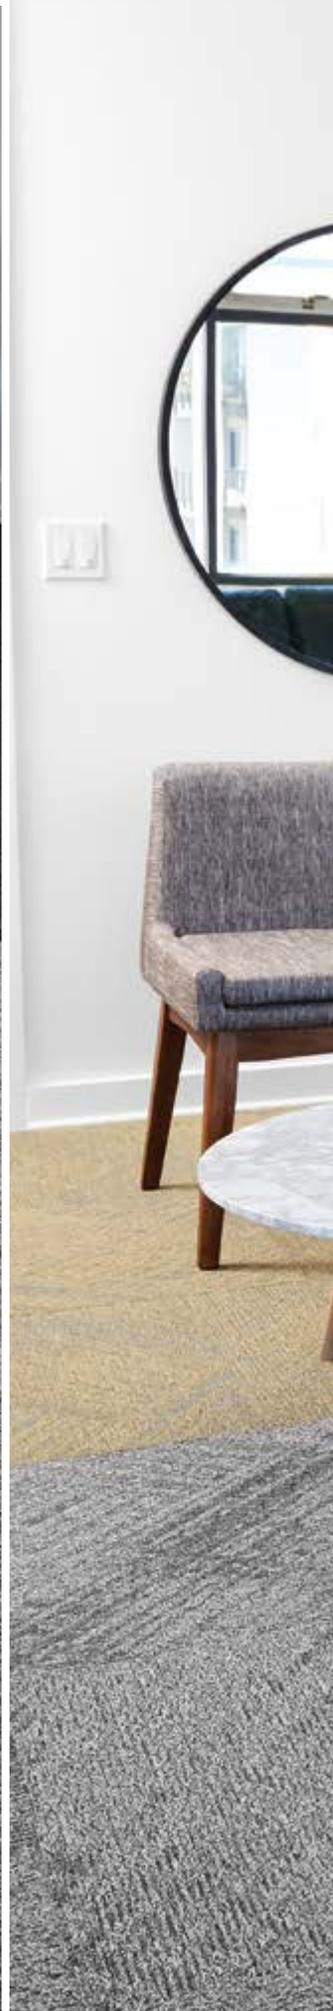



LEFT

**TELEPORT**

4TR240220T

Emanate 401452

24 in x 24 in

MONOLITHIC

RIGHT

**TELEPORT**


4TR240220T

TOP: Agitator 401450

BOTTOM: Emanate 401452

24 in x 24 in

QUARTER TURN

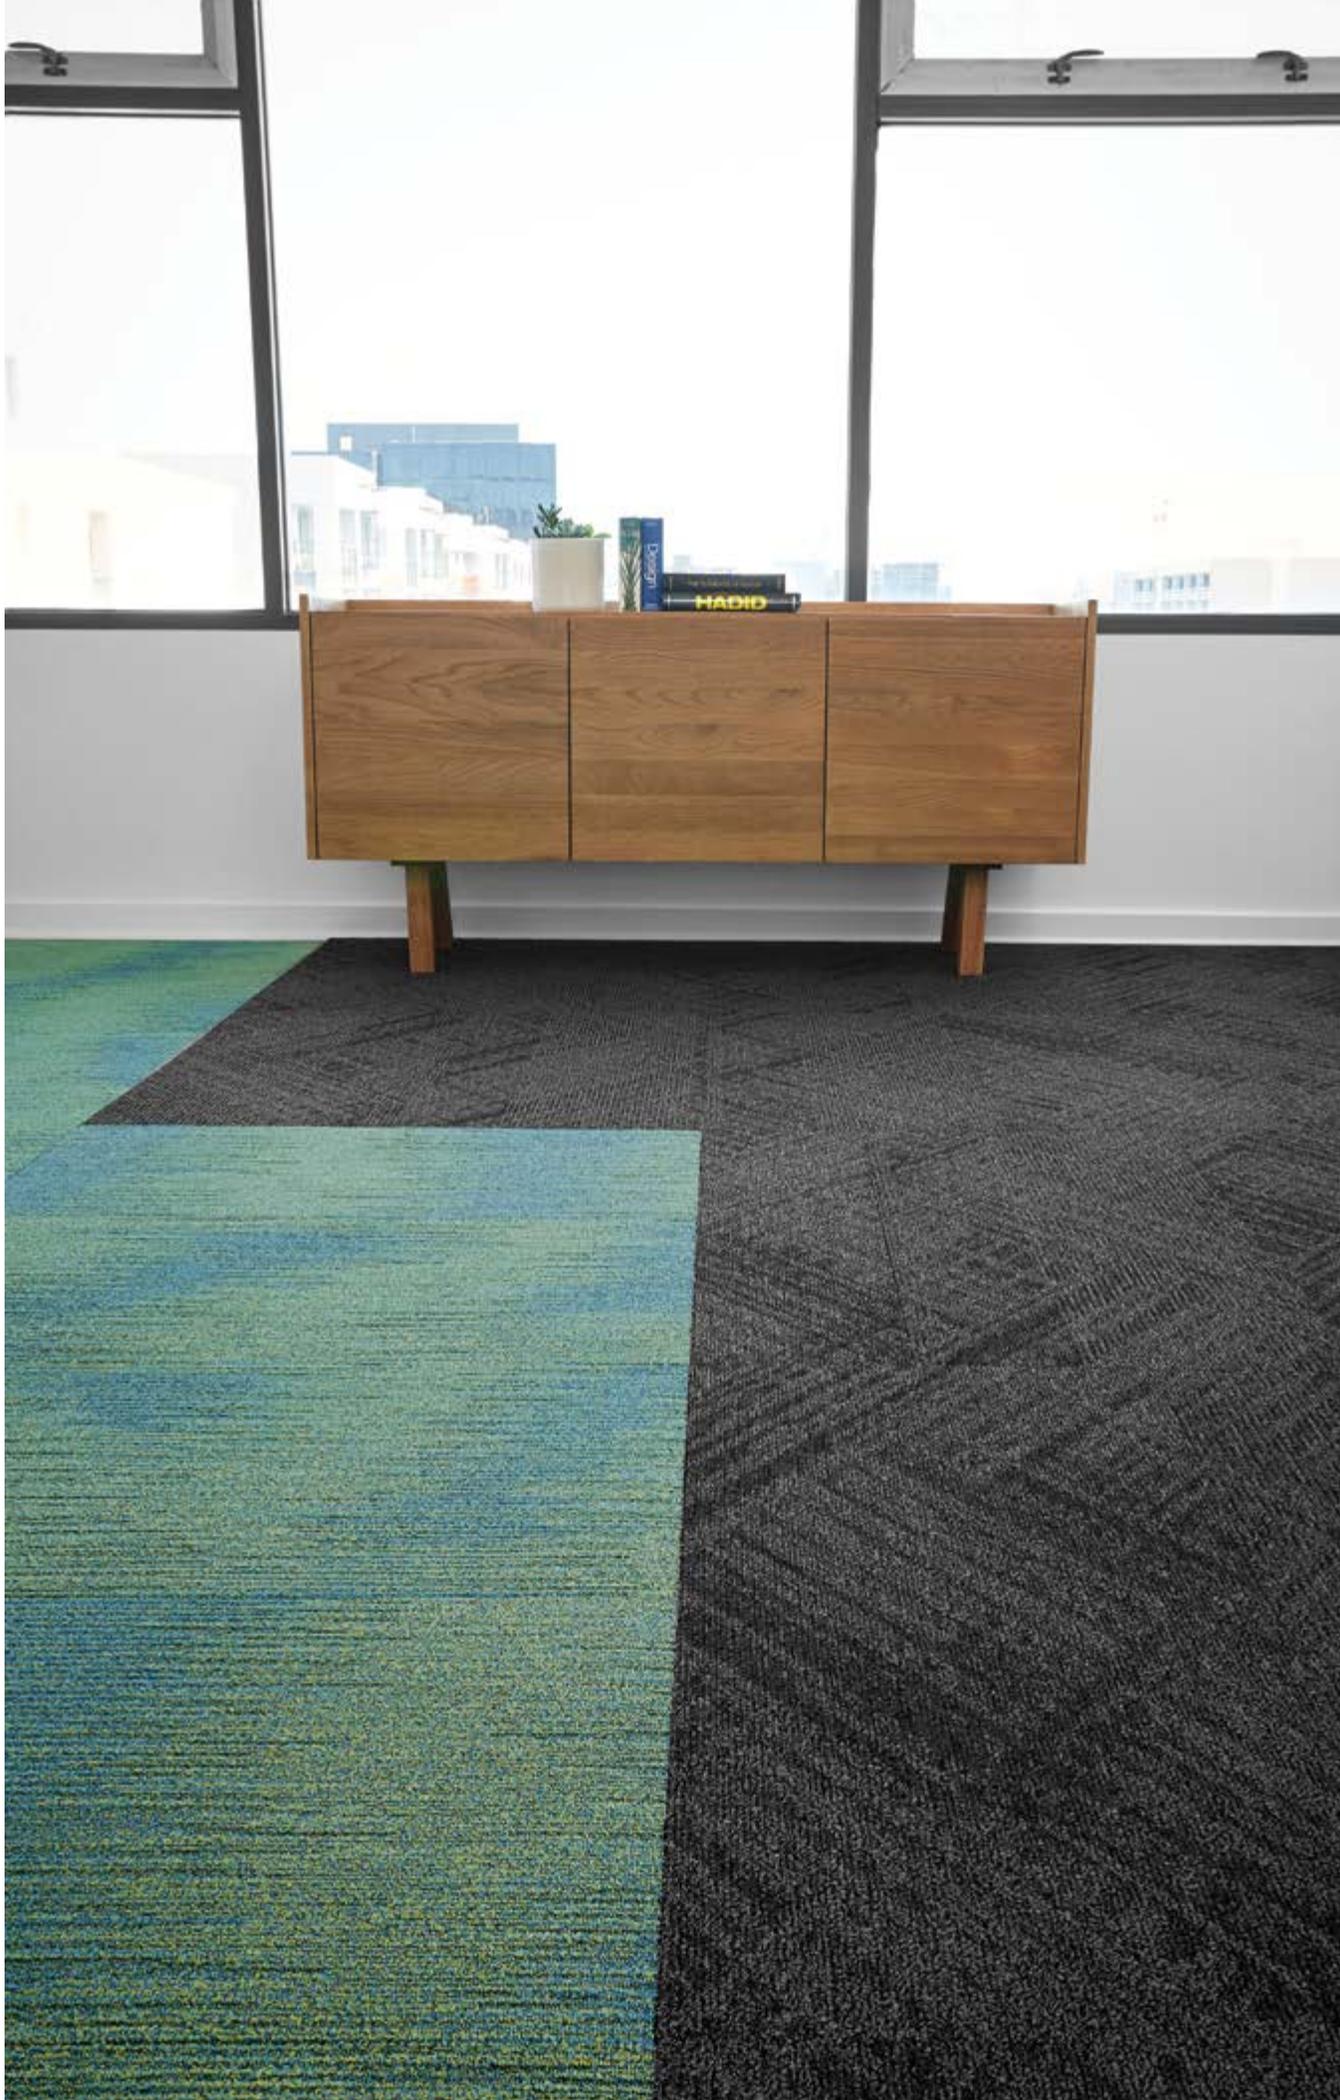

LEFT

**DISRUPTOR**

4DR240AA0T

COLORCAST

PDS# 253633-127

18 in x 36 in

BRICK

**TELEPORT**

4TR240AA0T

Meta 401461

18 in x 36 in

BRICK

RIGHT

**DISRUPTOR**

4DR240AA0T

ACCENT: COLORCAST

PDS# 253633-171/3

FIELD: Meta 401461

18 in x 36 in

HERRINGBONE








**DISRUPTOR**  
4DR240220T  
Radical 401456  
24 in x 24 in  
MONOLITHIC



**DISRUPTOR**  
4DR240220T  
Agitator 401450  
24 in x 24 in  
QUARTER TURN

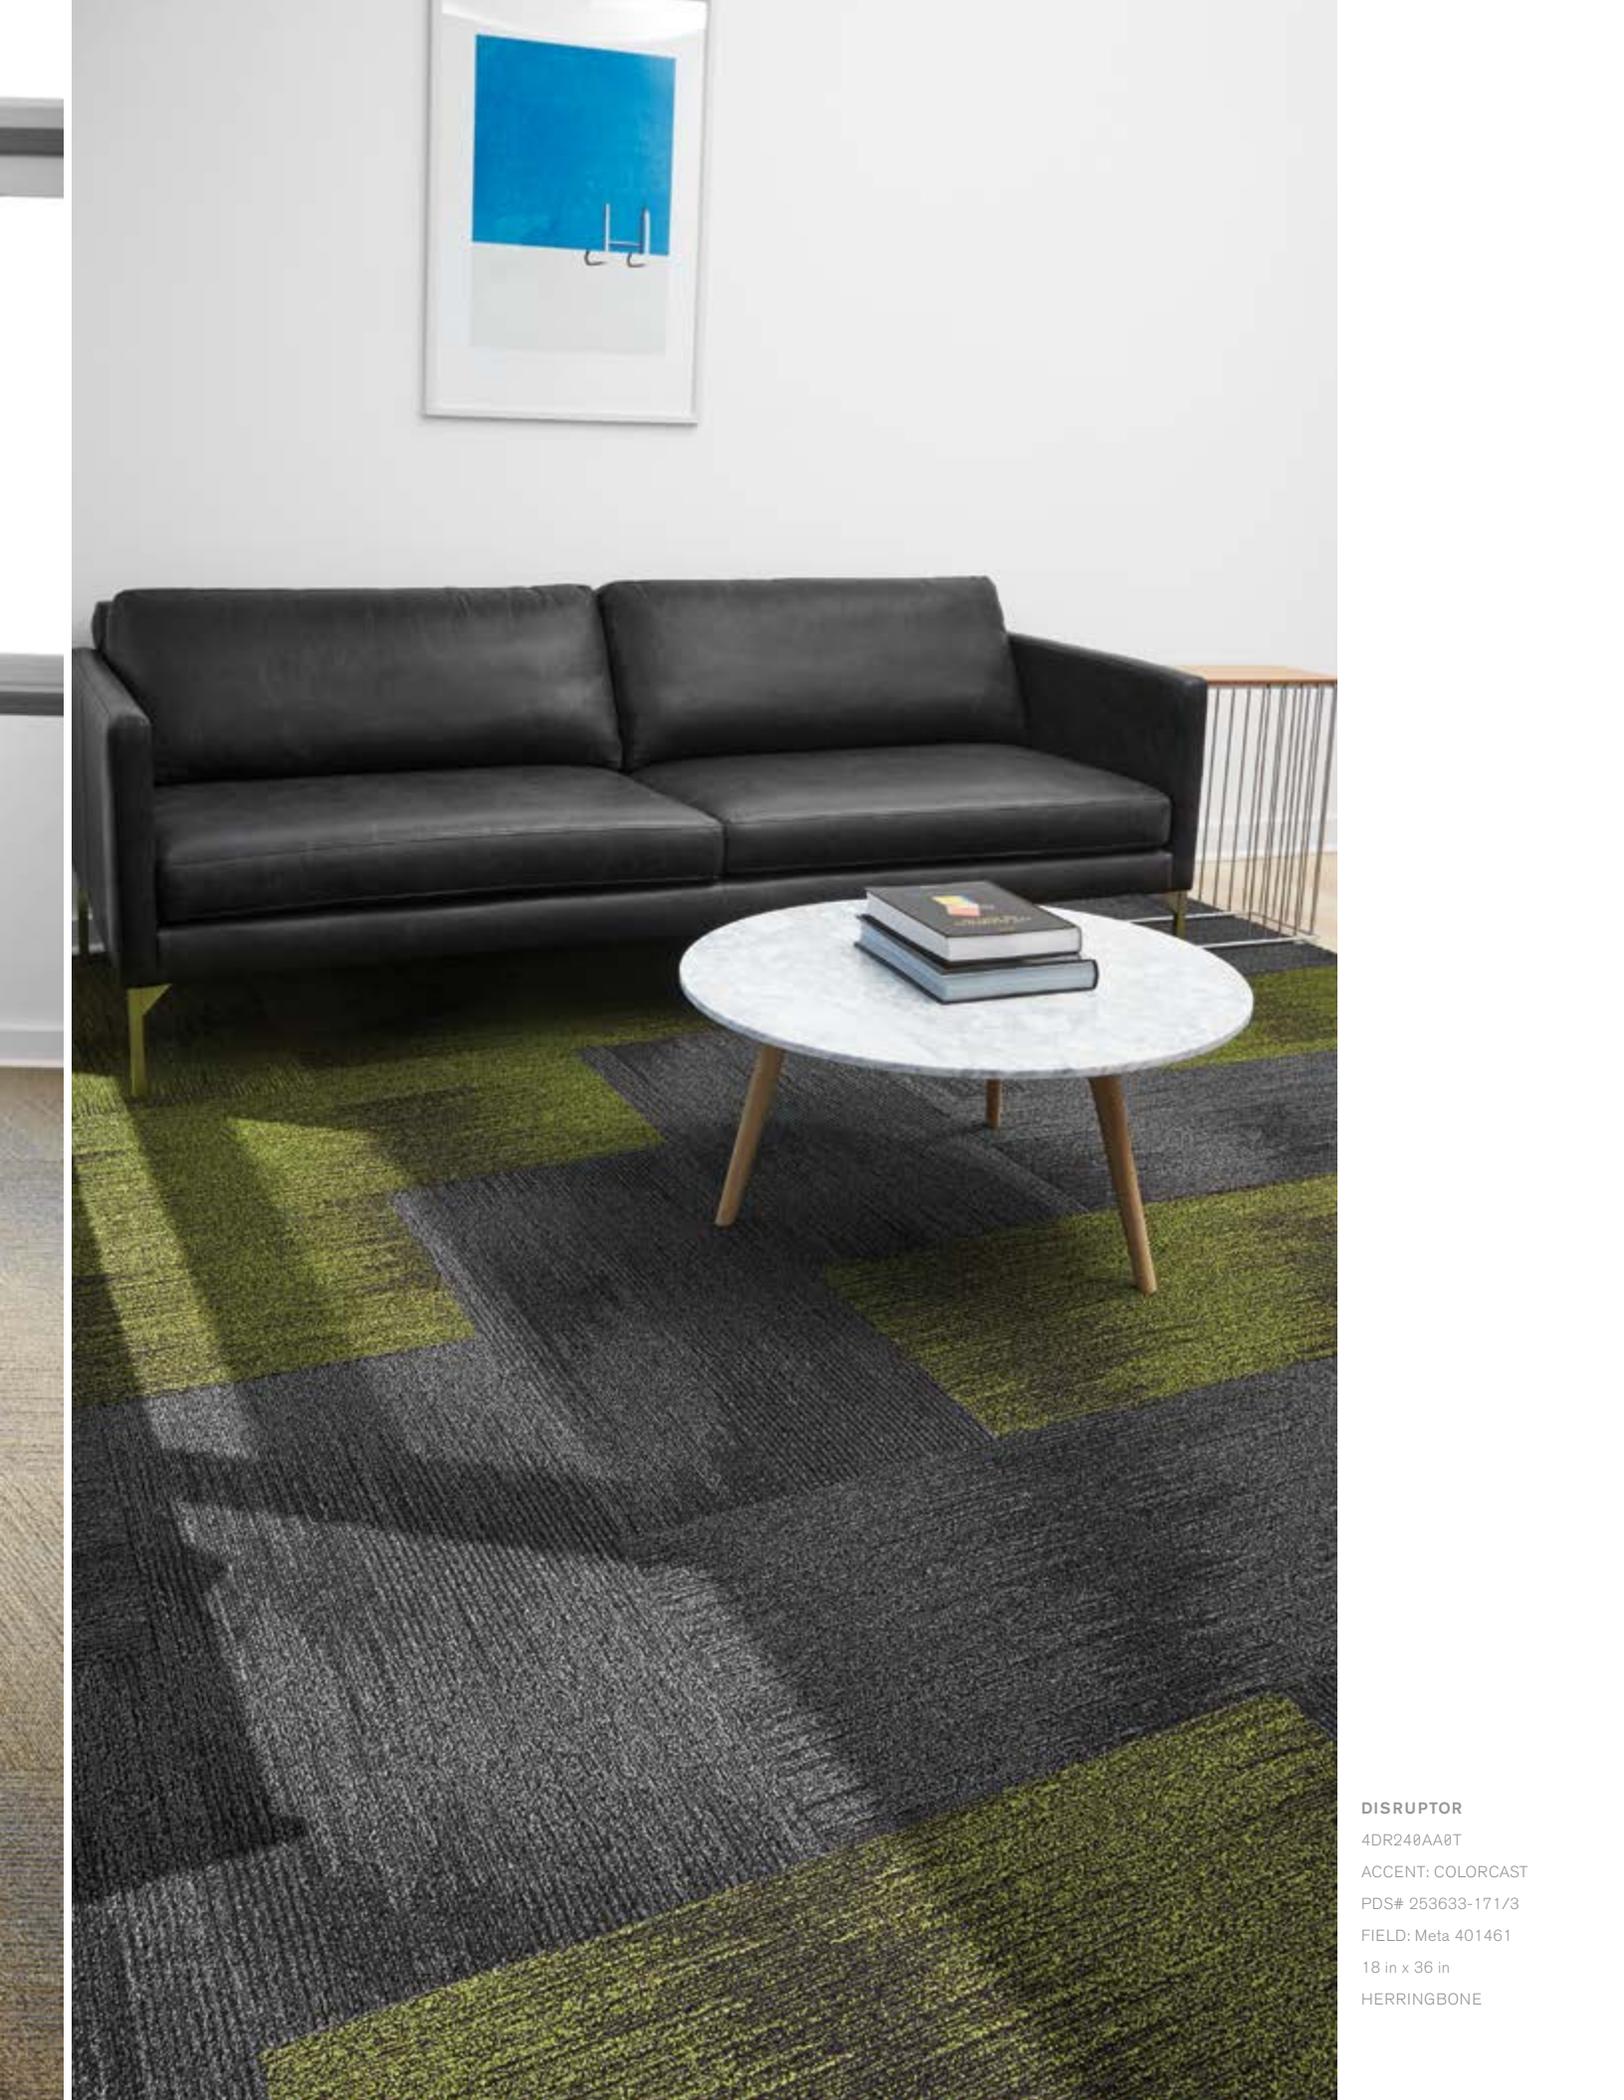

**DISRUPTOR**  
4DR240AA0T  
ACCENT: COLORCAST  
PDS# 253633-171/3  
FIELD: Meta 401461  
18 in x 36 in  
HERRINGBONE





LEFT  
**TELEPORT**  
4TR240AA0T  
Geo Leaping 401453  
Meta 401461  
18 in x 36 in  
PARQUET

RIGHT  
**DISRUPTOR**  
4DR240AA0T  
ACCENT: COLORCAST  
PDS# 253633-171/3  
FIELD: Meta 401461  
18 in x 36 in  
HERRINGBONE



**DISRUPTOR**

4DR240AA0T

INSET: COLORCAST

PDS# 253633-127

18 in x 36 in

BRICK

4DR240220T

FIELD: Meta 401461

24 in x 24 in

BRICK



**TELEPORT**  
4TR240AA0T  
Geo Leaping 401453  
18 in x 36 in  
HERRINGBONE

DISRUPTOR and TELEPORT color line as featured in architect folder.



Agitator 401450




Particles 401451




Emanate 401452



Geo Leaping 401453




Phase Jump 401454



Translocation 401455



Radical 401456



Flash Step 401457



Mover 401458



Shaker 401459



Incite 401460



Meta 401461

The printed images may not be an accurate reproduction of the products' actual colorways. Please note that images were taken in a loft, full of natural light. We strive to offer an authentic representation, but images may vary according to press run and location lighting. These images are intended as a guide only. If you would like a sample of this product, please call Customer Care at **800.423.4709**.

## SPECIFICATIONS

Style Number  
Product Construction  
Fiber  
Dye Method  
Soil/Stain Protection  
Secondary Backing

## DISRUPTOR™

4DR24  
Tufted Textured Loop  
Antron® Legacy™ Type 6,6 Nylon  
COLORCAST™  
XTERA™

NexStep® Cushion Tile  
AFIRMA™ Hardback Tile  
24 oz/yd<sup>2</sup> (813.7 g/m<sup>2</sup>)  
1/12 in (47.2 ends/10 cm)

Yarn Weight  
Machine Gauge  
Pile Height

High 0.140 in (3.6 mm)  
Medium 0.102 in (2.6 mm)  
Low 0.062 in (1.6 mm)  
Stitches 10.5/in (41.3 ends/10 cm)  
Pile Density 8,305 oz/yd<sup>3</sup>

Total Weight

NexStep® Cushion Tile 101 oz/yd<sup>2</sup> (3,424.5 g/m<sup>2</sup>)  
AFIRMA™ Hardback Tile 82 oz/yd<sup>2</sup> (2,780.3 g/m<sup>2</sup>)

Total Thickness

NexStep® Cushion Tile 0.330 in (8.4 mm)  
AFIRMA™ Hardback Tile 0.210 in (5.3 mm)

Pattern Repeat

None

Radiant Panel

Passes Class 1, ≥ 0.45 W/cm<sup>2</sup> (ASTM-E648)

Smoke Density

< 450 dm Corrected (ASTM-E662), Flaming

Static

≤ 3.5 kV (AATCC-134), Step

Flammability

Passes Methenamine Pill Test (CPSC-FF1-70)

## TELEPORT™

4TR24  
Tufted Textured Loop  
Antron® Legacy™ Type 6,6 Nylon  
COLORCAST™  
XTERA™

NexStep® Cushion Tile  
AFIRMA™ Hardback Tile  
24 oz/yd<sup>2</sup> (813.7 g/m<sup>2</sup>)  
1/12 in (47.2 ends/10 cm)

0.140 in (3.6 mm)

0.102 in (2.6 mm)

0.062 in (1.6 mm)

11.2/in (44.1 ends/10 cm)

8,160 oz/yd<sup>3</sup>

101 oz/yd<sup>2</sup> (3,424.5 g/m<sup>2</sup>)

82 oz/yd<sup>2</sup> (2,780.3 g/m<sup>2</sup>)

0.330 in (8.4 mm)

0.210 in (5.3 mm)

None

Passes Class 1, ≥ 0.45 W/cm<sup>2</sup> (ASTM-E648)

< 450 dm Corrected (ASTM-E662), Flaming

≤ 3.5 kV (AATCC-134), Step

Passes Methenamine Pill Test (CPSC-FF1-70)

**When selecting colors beyond those swatched in the architect folder, COLORCAST™ utilizes a standard order size of 50 square yards in tile or broadloom (based on availability) and up to 5% overage, with no upcharges. For more information, please contact your local account executive.**

## STYLE NUMBERS

### DISRUPTOR

4DR240AA0T  
4DR240220T  
4DR240AA0K  
4DR240220K

### TELEPORT

4TR240AA0T  
4TR240220T  
4TR240AA0K  
4TR240220K

### BACKING

NexStep® Cushion Tile  
NexStep® Cushion Tile  
AFIRMA™ Hardback Tile  
AFIRMA™ Hardback Tile

### SIZE


18 in x 36 in (45.72 cm x 91.44 cm)  
24 in x 24 in (60.96 cm x 60.96 cm)  
18 in x 36 in (45.72 cm x 91.44 cm)  
24 in x 24 in (60.96 cm x 60.96 cm)

antron. 




## RECOMMENDED CARPET TILE INSTALLATION METHODS


### 18 in x 36 in



Brick




Herringbone



Parquet


### 24 in x 24 in



Brick



Monolithic



Quarter Turn

Bentley's High PerformancePC, NexStep® Cushion Tile, and AFIRMA™ Hardback Tile products are Cradle to Cradle Certified™ Silver. Bentley products are also certified under the NSF/ANSI Standard 140 – Sustainable Carpet Assessment (NSF 140). Six of Bentley's standard backing products are NSF 140 certified at the Gold level or above. Bentley's carpet products are manufactured in our California mill, a LEED for Existing Buildings: Operations and Maintenance (LEED®-EBOM) Gold certified facility. Please inquire about product warranties for specific backing options.

Patterned carpet may require special attention by the installer to assure a suitable match, and must be addressed in the original labor quotation. Products that go through the shearing process may result in a small loss of yarn weight. Slight variations in color among different production lots are normal and should be considered in the overall installation plan. Carpet specifications and components are subject to normal manufacturing tolerances and may change without notice. Technical performance characteristics are subject to adjustment based on results of post-manufacture testing. Product warranted in accordance with the terms and conditions of Bentley's standard printed warranty in effect at time product is sold. All other warranties, including without limitation any implied warranties of merchantability or fitness for a particular purpose, are hereby disclaimed. Made in USA. Warning: unauthorized reproduction of this carpet design constitutes copyright infringement. ©2017 Bentley Mills, Inc.

Need additional samples or information? 800.423.4709 | BENTLEYMILLS.COM  
(BK-CP-0117)

**BENTLEY®**



800.423.4709 | BENTLEYMILLS.COM

14641 E. DON JULIAN ROAD, CITY OF INDUSTRY, CA 91746