



BENTLEY®

GROUND RULES

LUXURY VINYL TILE



BENTLEY




Ground Rules



The cardinal rule of interior design is the symbiotic nature of form and function, style and performance. Mindful observers of this rule will design rooms that quietly make way for their intended purpose, while impressing with a gracious experience.

Ground Rules LVT effortlessly makes a great impression. Like any well-mannered presence in the room, it shows up with consistency and good taste. Offered in nine different shades and textures, and specifically formatted in narrow lengths, Ground Rules recalls the natural wood floors of our most comfortable living spaces. The high-performing wear layer ensures confidence in the installation and the option to choose an enhanced acoustic backing means it easily adapts to all kinds of interior environments—winning extra points for good behavior.

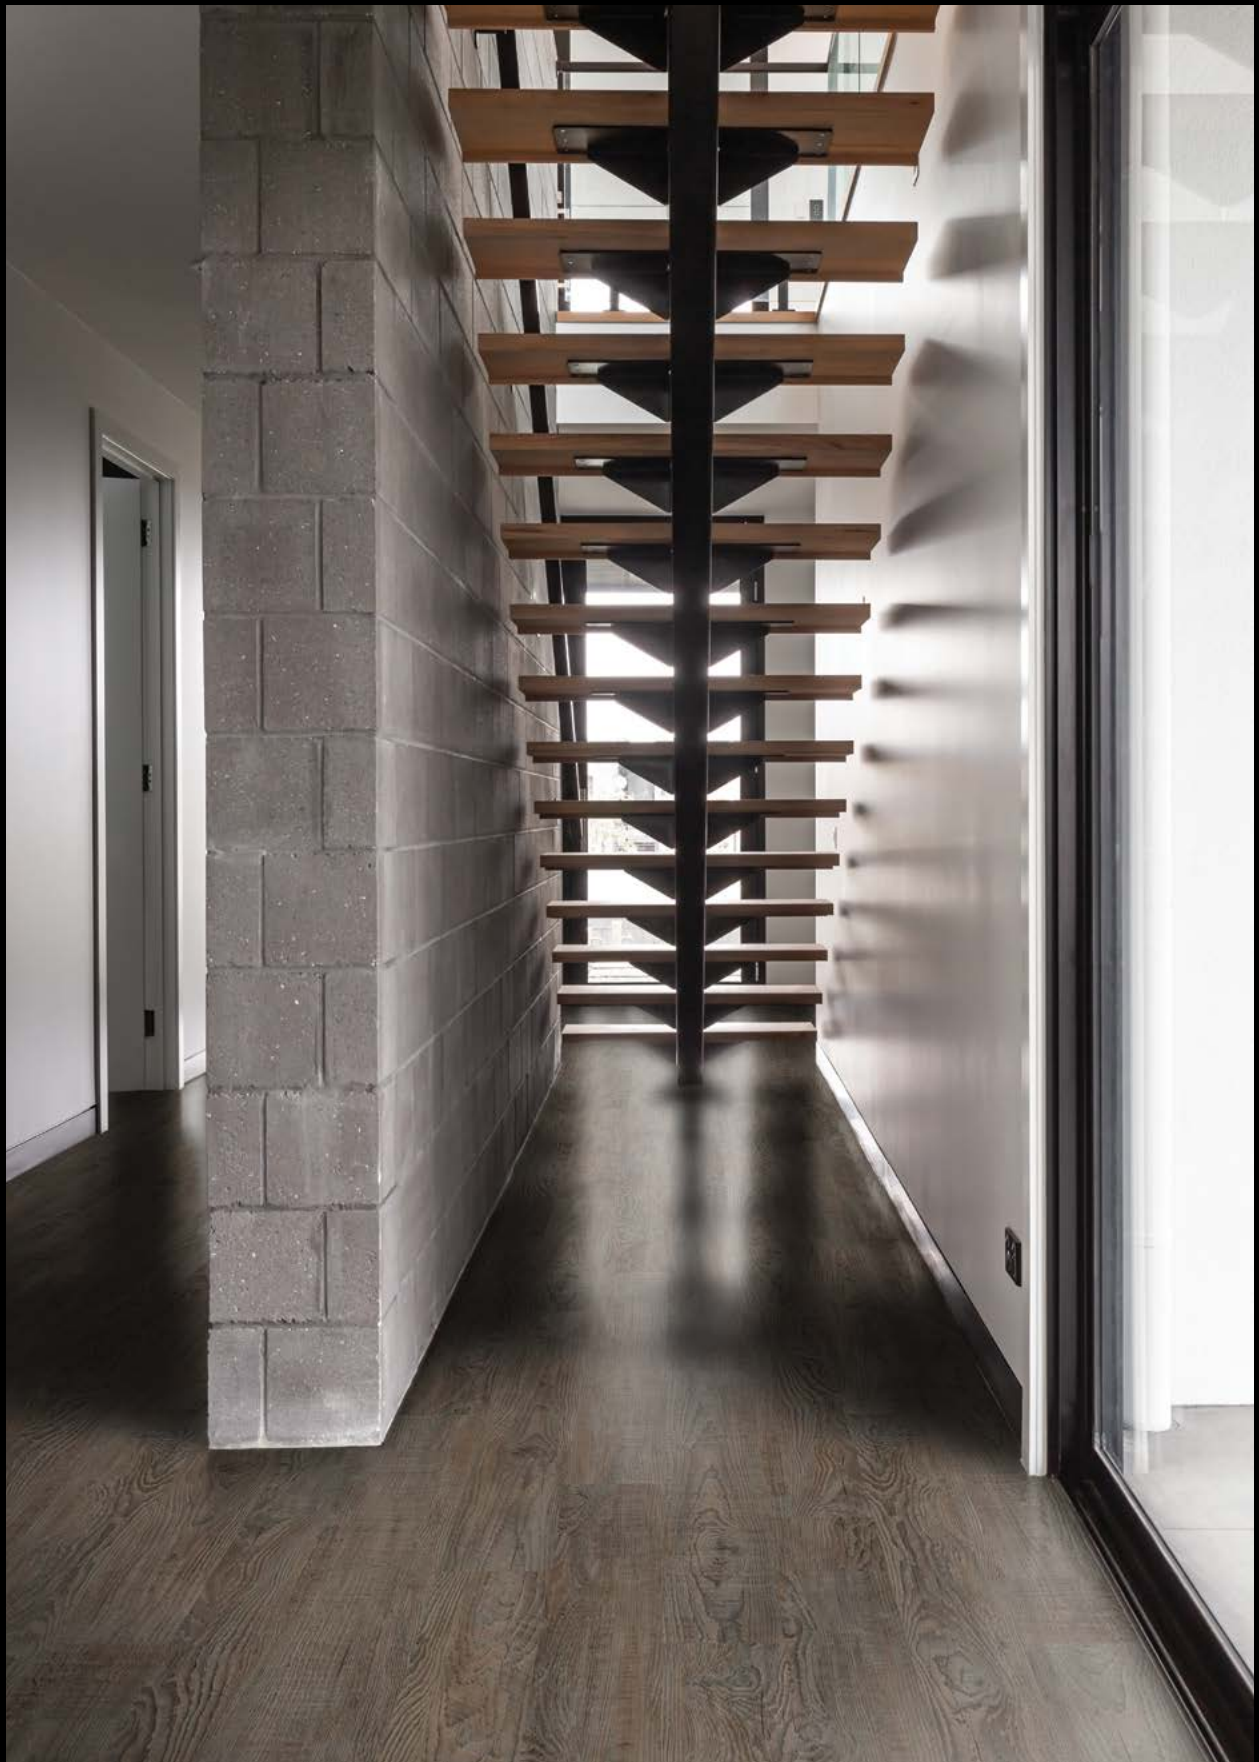

GROUND RULES™ BGRRUL, MUTE DEVICES 802016, 6 IN X 48 IN - RANDOM ASHLAR

BENTLEY



GROUND RULES BGRRUL, BE ON TIME 802017, 6 IN X 48 IN - RANDOM ASHLAR



GROUND RULES BGRRUL, FRESH START 802010, 6 IN X 48 IN - RANDOM ASHLAR





GROUND RULES BGRRUL, COFFEE FIRST 802012, 6 IN X 48 IN - RANDOM ASHLAR



GROUND RULES BGRRUL, FIRST IN LINE 802018, 6 IN X 48 IN - RANDOM ASHLAR



GROUND RULES BGRRUL, WAIT YOUR TURN 802015, 6 IN X 48 IN - RANDOM ASHLAR



GROUND RULES BGRRUL, WASH YOUR HANDS 802014, 6 IN X 48 IN - RANDOM ASHLAR

GROUND RULES™ - LUXURY VINYL TILE



Fresh Start
802010



Manners Matter
802011



Coffee First
802012



Come Prepared
802013



Wash Your Hands
802014



Wait Your Turn
802015



Mute Devices
802016



Be On Time
802017



First In Line
802018


Style Numbers

2.5 MM	BGRRUL648U
5 MM	BGRRUL648V
5 MM ACOUSTIC	BGRRUL648A

For complete product specifications, visit bentleymills.com

	LVT 2.5 mm	LVT 5 mm	LVT 5 mm Acoustic
Tile Size	6 in x 48 in	6 in x 48 in	6 in x 48 in
Gauge Total Thickness	2.5 mm	5 mm	5 mm
Wear Layer Thickness	20 mil (0.51 mm)	20 mil (0.51 mm)	20 mil (0.51 mm)
Install Type	Direct Glue	Direct Glue	Direct Glue

Recommended Installation Methods

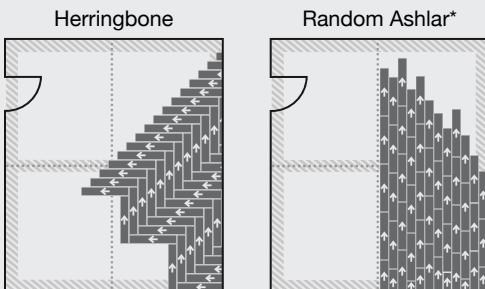

*For Random Ashlar installations, the stagger must not be less than 12 inches.

Colors may vary slightly between production runs. The printed images may not be an accurate reproduction of the product's actual colorways. We strive to offer an authentic representation, but images may vary according to press run and location lighting. These images are intended as a guide only. If you would like a sample of this product, please call Customer Care at 800.423.4709.



GROUND RULES BGRRUL, COME PREPARED 802013, 6 IN X 48 IN - RANDOM ASHLAR

Installation: All Bentley Luxury Vinyl Tile products must be installed by flooring installers who are professionally trained and experienced in current techniques and industry accepted standards for professional installation of luxury vinyl tile flooring. Please refer to the current issue of Bentley's Luxury Vinyl Tile (LVT) Installation Guidelines.

Adhesives: For glue down installations, all Bentley Luxury Vinyl Tile products must be installed with adhesives purchased through Bentley, and matched to requirements of Bentley for flooring material, site and project conditions. Please refer to the current issue of Bentley's Luxury Vinyl Tile (LVT) Installation Guidelines.

Maintenance: Please refer to the current issue of Bentley's Luxury Vinyl Tile (LVT) Maintenance Guidelines.

Warranty: Product warranted in accordance with the terms and conditions of Bentley's standard printed warranty in effect at time product is sold. All other warranties, including without limitation any implied warranties of merchantability or fitness for a particular purpose are hereby disclaimed. For complete warranty information, please refer to Bentley's Luxury Vinyl Tile (LVT) Warranty Terms. ©2022 Bentley Mills, Inc.

Need additional samples or information? 800.423.4709 | bentleymills.com

(BK-CP-0322)

BENTLEY

BENTLEY

800.423.4709 | BENTLEYMILLS.COM

14641 EAST DON JULIAN ROAD, CITY OF INDUSTRY, CALIFORNIA 91746